

V501, EDITION 3  
 Prepared by the U.S. Army Topographic Command (BEGN), Washington, D.C. Compiled in 1955 by photogrammetric methods from aerial photographs taken 1953 and from U.S. Lake Survey Charts, 51 and 52, 1954-55; Windsor, Ontario, Canada, 1:253,440, 1943. Photographs field annotated 1954. United States area revised in 1971 by the U.S. Geological Survey from aerial photographs taken 1968-1970.  
 Selected hydrographic data compiled from USCGS charts. This information is not intended for navigational purposes.  
 Location of geoidetic control established by government agencies is shown on corresponding 1:250,000-scale Geoidetic Control Diagram.

**LEGEND**

Figures in red denote approximate distances in miles between stars

**POPULATED PLACES**

Over 500,000	Primary, all-weather, hard surface
100,000 to 500,000	Secondary, all-weather, hard surface
25,000 to 100,000	Light-duty, all-weather, hard or improved surface
5,000 to 25,000	Fair or dry weather, unimproved surface
Less than 5,000	Trail

**ROADS**

Interchange

Route markers: Interstate, U.S., State

**RAILROADS**

Single track, Double or Multiple

Standard gauge

Narrow gauge

Landplane airport

Landing area

Seaplane airport

Seaplane anchorage

Park or reservation

Mine

Spot elevation in feet

229 Woods brushwood

**BOUNDARIES**

International

State or province

County

City or town

Water

Marsh or swamp


**CONTOUR INTERVAL 50 FEET**

**TRANSVERSE MERCATOR PROJECTION**

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 17 FOR THE CENTER OF THE WEST EDGE TO 54° (100 MILES) WESTERLY FOR THE CENTER OF THE EAST EDGE

1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 3M° (60 MILES) WESTERLY FOR THE CENTER OF THE WEST EDGE TO 5M° (100 MILES) WESTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, WASHINGTON, D.C. 20242

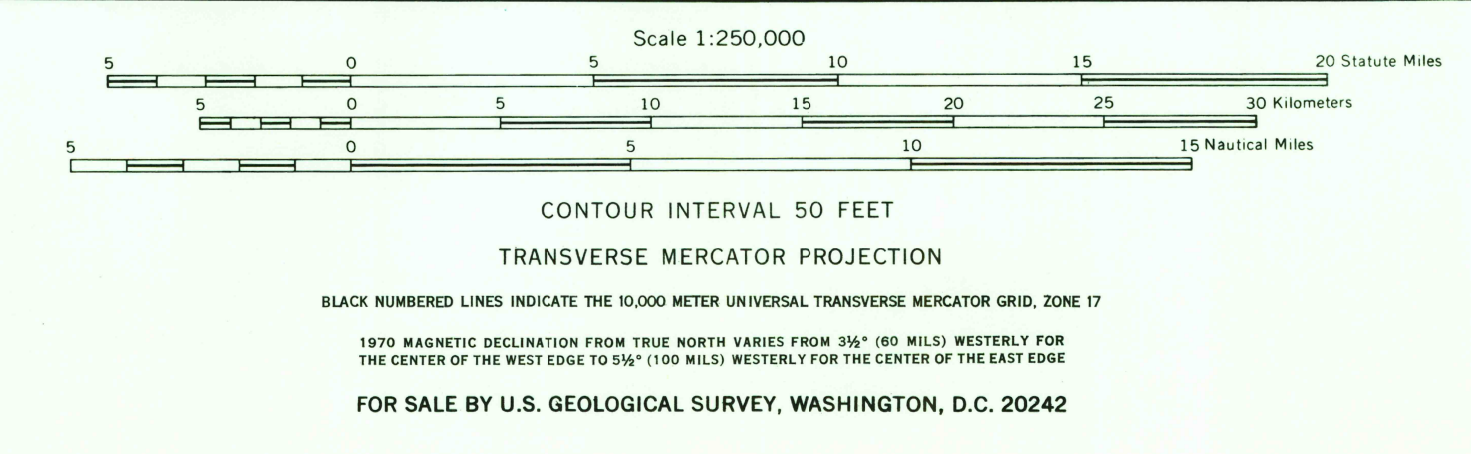

STOCK NO. V501XNK171 \*\*\*03