



UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

MINNESOTA
KENNEDY QUADRANGLE
15-MINUTE SERIES

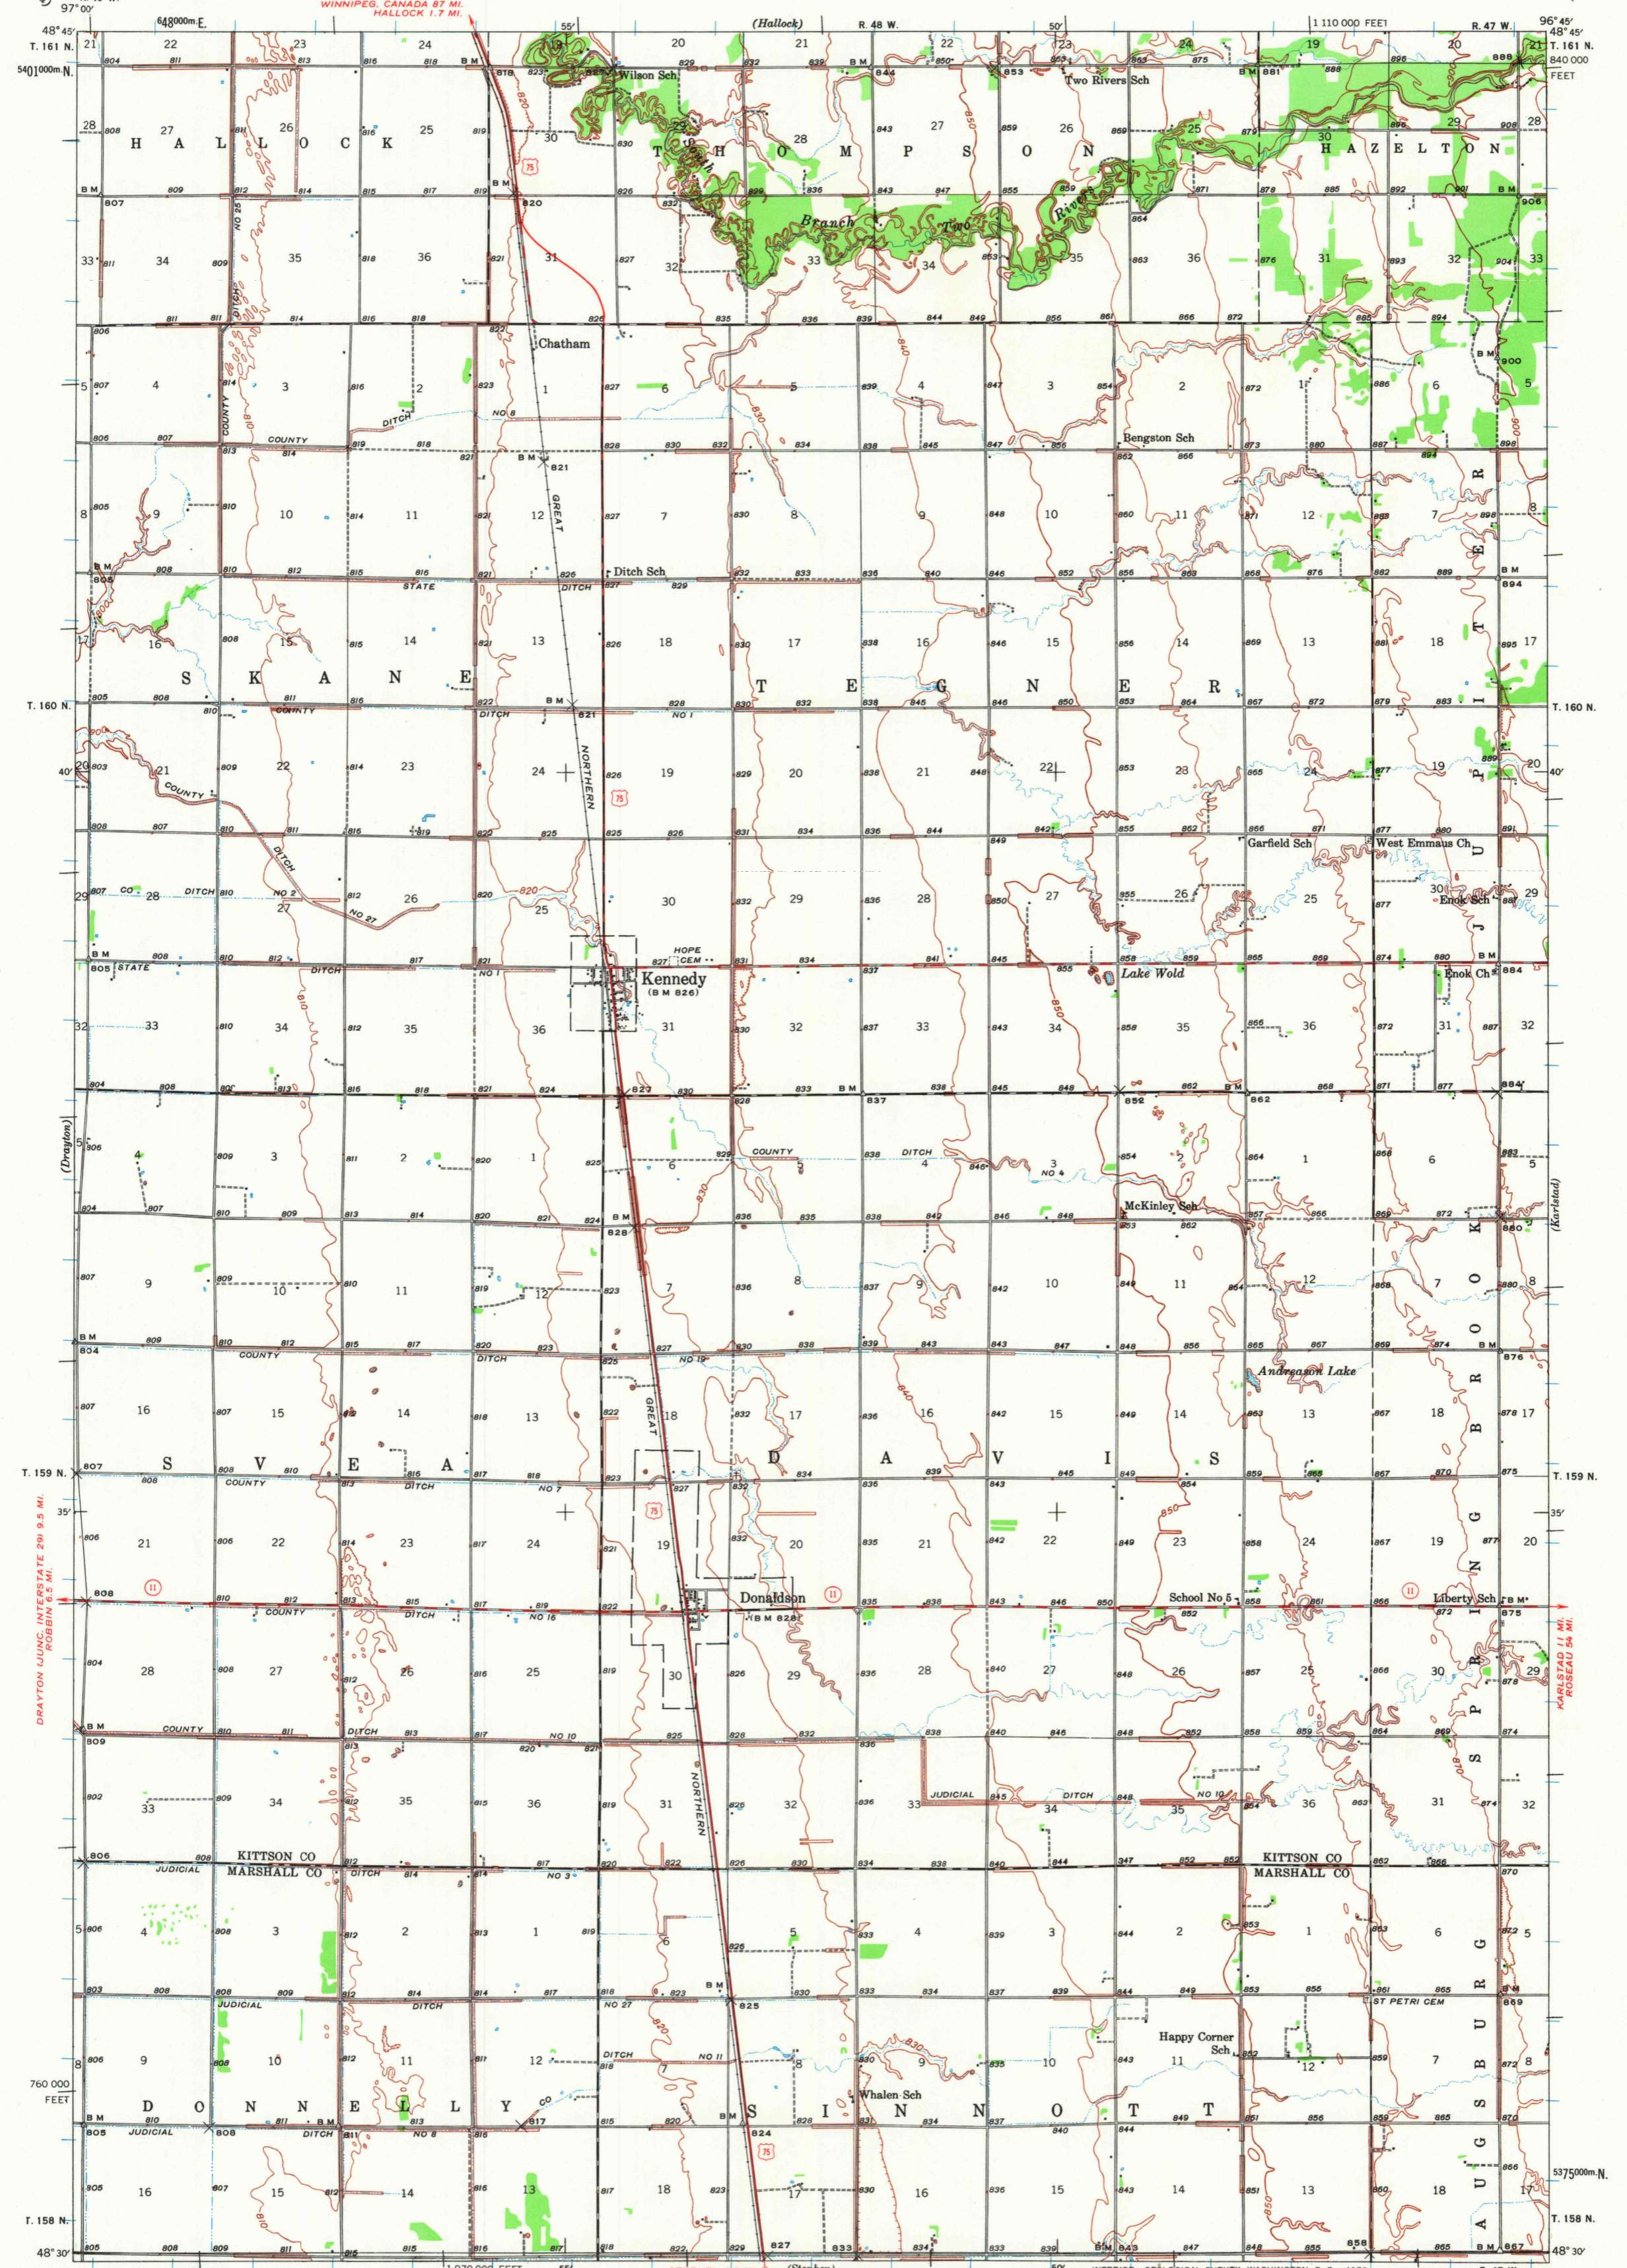

Topography by H. E. Simmons
E. W. Goucheour, H. W. Toy, C. H. Parker,
and R. C. Hass
Surveyed in 1939

ROAD CLASSIFICATION
1963
Heavy-duty ——— Light-duty ———
Medium-duty ——— Unimproved dirt ———
U.S. Route State Route
APPROXIMATE MEAN DECLINATION, 1939

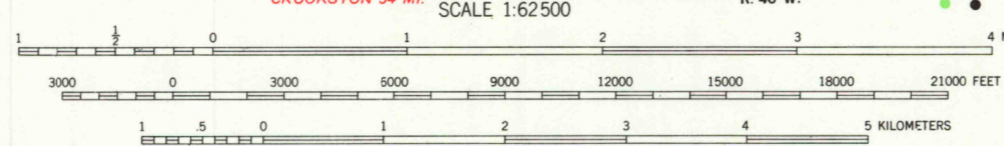

CONTOUR INTERVAL 10 FEET
DATUM IS MEAN SEA LEVEL

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225 OR WASHINGTON, D. C. 20242
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

Polyconic projection. 1927 North American datum
10,000-foot grid based on Minnesota (North)
rectangular coordinate system
1000-meter Universal Transverse Mercator grid ticks,
zone 14, shown in blue

SEP 18 1973
KENNEDY, MINN.
N4830—W9645/15
1939

USGS
Historical File
Topographic Division

1195